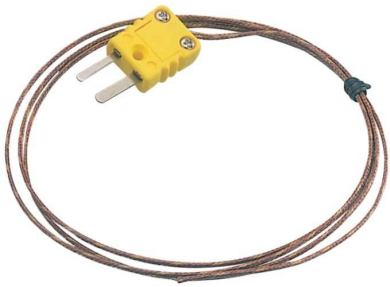
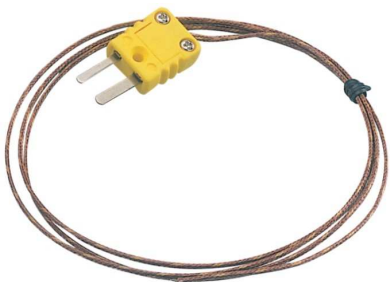
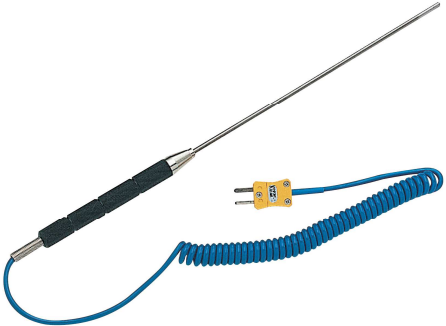


Thermocouple Probes and Adapters

<u>Transition Adaptor K type</u> Model TA100 - For use with a variety of multimeters that have built-in temperature measurement functions and permit K-type thermocouples and temperature probes to be connected to the banana jack inputs. Temperature probe is not included in delivery. - Adapts Type-K thermocouple mini-connector to dual shrouded banana plug inputs - Measurement range and accuracy: probe dependent - Suitable for low voltage applications (below 30 V AC, 60 V DC)	
<u>Bead Probe</u> Model TPK-01-1.6mm-1M - Stainless tiny probe Thermocouple for high temperature measurement - Type- K Stainless shields thermocouple - Temperature range -50°C~800°C (Can not stand high temperature for long time measurement) 1.6 mm stainless tiny probe can be dented and insert it into narrow area - Its length is 1 Meter - Using Industry Standard miniature K type thermocouple connector plug	
<u>Thermocouple Extension Cable</u> Model TPK01FM-5M - K Type Thermocouple Extension Cable Length : 5m long - With female and male connectors to meet any K type thermocouple extension	
<u>Bead Probe</u> Model KTP1 -40°C ~ 1370°C General purpose, teflon tape insulation needle type. Not suitable for liquid immersion - The temperature rating for the insulation is 480°C - Accuracy: With respect to ANSI MC96.1-1982-Standard Limits of Error for K-type: $\pm 2.2^{\circ}\text{C}$ - Length: 90 cm	

<u>Bead Probe</u> Model KTP1.5 -40°C ~ 1370°C General purpose, teflon tape insulation needle type. Not suitable for liquid immersion - The temperature rating for the insulation is 480°C - Accuracy: With respect to ANSI MC96.1-1982-Standard Limits of Error for K-type: ± 2.2 °C - Length: 150 cm	
<u>Bead Probe</u> Model KTP2 -40°C ~ 1370°C General purpose, teflon tape insulation needle type. Not suitable for liquid immersion - The temperature rating for the insulation is 480°C - Accuracy: With respect to ANSI MC96.1-1982-Standard Limits of Error for K-type: ± 2.2 °C - Length: 200 cm	
<u>Bead Probe</u> Model KTP7 - Temperature probe with banana plug, K-type -40°C ~ 1370°C general purpose, teflon tape insulation needle type. Not suitable for liquid immersion - The temperature rating for the insulation is 480°C - Accuracy: With respect to ANSI MC96.1-1982-Standard Limits of Error for K-type: ± 2.2 °C - Length: 100 cm	
<u>Immersion Probe</u> Model TPK03 -50°C ~ 800°C general purpose needle type with stainless round head, (stainless steel) - For measuring internal temperatures of liquids, semi-solids such as oils, rubbers, plastics, power, clays, meats, fruits, frozen foodstuffs - Pipe: 200 mm, handler 120 mm, wire 740 mm, diameter of pipe 3,2mm - Accuracy: With respect to ANSI MC96.1-1982-Standard Limits of Error for K-type: ± 2.2 °C	

Immersion Probe
Model TPK03S

- -50°C ~ 800°C general purpose needle type with stainless round head, (stainless steel)
- For measuring internal temperatures of liquids, semi-solids such as oils, rubbers, plastics, power, clays, meats, fruits, frozen foodstuffs
- Pipe: 100 mm, handler 55 mm, wire 590 mm, diameter of pipe 3,2 mm
- Accuracy: With respect to ANSI MC96.1-1982-Standard Limits of Error for K-type: ± 2.2 °C


Surface Probe
Model TPK04

- -50°C ~ 500°C
- Fast response probe, (stainless steel)
- Ideal for measuring the surface temperature of smallelectronic parts
- Pipe: 80 mm, handler 120 mm, wire 740 mm, diameter of head 14 mm
- Accuracy: With respect to ANSI MC96.1-1982-Standard Limits of Error for K-type: ± 2.2 °C
- One Stripe type High quality sensor for long durability

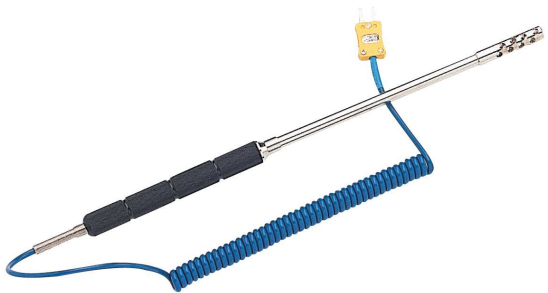

Surface Probe
Model TPK04L

- -50°C ~ 500°C
- 90° angle surface probe, (stainless steel)
- Fast response probe
- Ideal for measuring the surface temperature
- Pipe: 165 mm and 63 mm, handler 120 mm, wire 740 mm, diameter of head 14 mm
- Accuracy: With respect to ANSI MC96.1-1982-Standard Limits of Error for K-type: ± 2.2 °C
- One Stripe type High quality sensor for long durability


Surface Probe
Model TPK04S

- -50°C ~ 500°C
- 90° angle surface probe, (stainless steel)
- Fast response probe
- Ideal for measuring the surface temperature
- Pipe: 14 mm, handler 100 mm, wire 740 mm, diameter of head 15mm
- Accuracy: With respect to ANSI MC96.1-1982-Standard Limits of Error for K-type: ± 2.2 °C
- One Stripe type High quality sensor for long durability



Air probe Model TPK05 -50°C ~ 600°C - Fast response probe, (stainless steel) - Ideal for measuring air, gases, freezers, ovens, fans and its drilled sheath protects element and assures airflow - Pipe: 87 mm, handler 140 mm, wire 740 mm, diameter of pipe 8mm - Accuracy: With respect to ANSI MC96.1-1982 Standard Limits of Error for K-type: $\pm 2.2^{\circ}\text{C}$	
Roller Probe Model TPK06 -50°C ~ 250°C - Fast response probe - Ideal for measuring moving rotating, stationary surface or moving conveyors for molds, textiles, prints, PC boards, papers, textiles - Handler 100 mm, wire 70cm, dimensions of roller plate 50 mm x 50 mm - Accuracy: With respect to ANSI MC96.1-1982- Standard Limits of Error for K-type: $\pm 2.2^{\circ}\text{C}$	
Magnetized Probe Model TPK07 -50°C ~ 250°C - Fast response probe - Ideal for measuring magnetic surface such as motors, transformers dryers, blast furnaces, heating elements - Handler 35 mm, wire 70cm, dimensions of plate 30 mm x 20 mm - Accuracy: With respect to ANSI MC96.1-1982- Standard Limits of Error for K-type: $\pm 2.2^{\circ}\text{C}$	