


PHASE ROTATION TESTER WITH VOLTMETER

- 3 functions in one unit: Phase Rotation, Phase Presence, Voltmeter
- LCD contact type Phase Rotation Tester
- Large LCD to show phase rotation and phase presence
- Check a wide range of three phase power sources
- Voltage range for phase rotation test: 75~600V AC
- Frequency range: 40~400Hz
- 6000-count voltmeter
- Auto ranging Voltmeter AC/DC
- Data hold function
- Auto power off
- Convenient stand for viewing
- Easy to use
- Comply with
 - EN 61010-1 CAT III 600V
 - EN 61010-2-033
 - EN 61326-1



INSTRUMENT LAYOUT

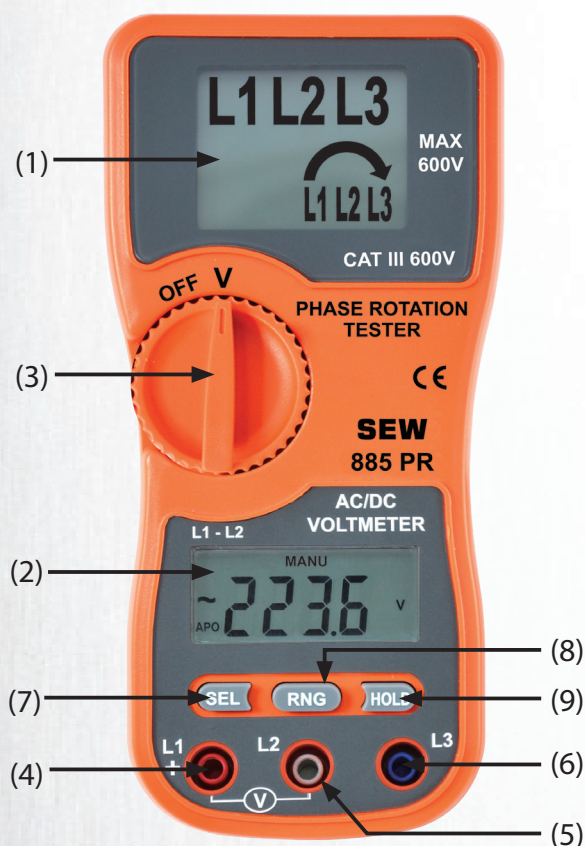

- (1) LCD for Phase Rotation
- (2) LCD for Voltmeter
- (3) Rotary Switch
- (4) L1 Terminal
- (5) L2 Terminal
- (6) L3 Terminal
- (7) SEL Button
- (8) RNG Button
- (9) HOLD Button



SPECIFICATIONS

Voltage Range	75~600Vac
Frequency Range	40~400Hz
Circuit Structure	All electronic
Dimension	165(L) x 82(W) x 45(D)mm
Weight (battery included)	Approx. 245g
Power Source	1.5V (AAA) battery x 2
Display	LCD
Accessories	Instruction manual Batteries Test leads
Safety Standard	EN 61010-1 CAT III 600V EN 61010-2-033 EN 61326-1

Voltmeter:

ACV

Range	Resolution	Accuracy
600mV	0.1mV	±(3.5% rdg+5dgt)
6V	1mV	
60V	10mV	
600V	0.1V	

DCV

Range	Resolution	Accuracy
600mV	0.1mV	±(0.8% rdg+3dgt)
6V	1mV	
60V	10mV	
600V	0.1V	